

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 501.38642X00

First Inventor or Application Identifier Tetsuya YAMADA

Title LOW POWER CONSUMPTIO9N MICROPROCESSOR

Express Mail Label No.

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents,  
Box Patent Application  
Washington, DC 20231

1. ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)

2. ☒ Specification [Total Pages 53]  
(preferred arrangement set forth below)

- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 8]

4. Oath or Declaration [Total Pages 4]

- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)
- i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting  
inventor(s) named in the prior application,  
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

\* NOTE FOR ITEMS 1 & 13 IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY  
FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT  
IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

5. ☐ Microfiche Computer Program (Appendix)

6. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)

- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))

8. ☐ 37 C.F.R. § 3.73(b) Statement ☒ Power of  
(when there is an assignee) Attorney

9. ☐ English Translation Document (if applicable)

10. ☒ Information Disclosure ☒ Copies of IDS  
Statement (IDS)/PTO-1449 Citations

11. ☒ Preliminary Amendment

12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)

13. ☐ \* Small Entity ☐ Statement filed in prior application  
Statement(s) Status still proper and desired  
(PTO/SB/09-12)

14. ☒ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)

15. ☐ Other: \_\_\_\_\_

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_

Group / Art Unit: \_\_\_\_\_

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 17. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

020457

or ☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name

Address

City

State

Zip Code

Country

Telephone

Fax

Name (Print/Type)

Gregory E. Montone

Registration No (Attorney/Agent)

28,141

Signature

Date

JUNE 26, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: YAMADA et al.  
Serial No.: Not yet assigned  
Filed: On even date  
For: LOW POWER CONSUMPTION MICROPROCESSOR

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents  
Washington, D.C. 20231

June 26, 2000

Sir:

Prior to examination, please amend the above-identified application as follows:

IN THE CLAIMS

Please amend the claims as follows:

Claim 4, line 1, delete "through" insert -- or --;  
line 2, delete "3" insert -- 2 --.  
Claim 5, line 1, delete "through" insert -- or --;  
line 2, delete "3" insert -- 2 --.  
Claim 6, line 1, delete "through" insert -- or --;  
line 2, delete "5" insert -- 2 --.  
Claim 8, line 1, delete "through" insert -- or --;  
line 2, delete "7" insert -- 2 --.  
Claim 9, line 1, delete "through" insert -- or --;  
line 2, delete "8" insert -- 2 --.  
Claim 10, line 2, delete "through" insert -- or --, delete  
"9" insert -- 2 --.

Claim 14, line 1, after "11" insert -- or --;  
line 2, delete "through", delete "13" insert  
-- 12 --.

Claim 15, line 1, after "11" insert -- or --;  
line 2, delete "through", delete "14" insert  
-- 12 --.

Claim 16, line 1, after "11" insert -- or --;  
line 2, delete "through", delete "15" insert  
-- 12 --.

Claim 17, line 1, after "11" insert -- or --;  
line 2, delete "through", delete "16" insert  
-- 12 --.

Claim 18, line 1, after "11" insert -- or --;  
line 2, delete "through", delete "17" insert  
-- 12 --.

Claim 22, line 1, after "19" insert -- or --;  
line 2, delete "through", delete "21" insert  
-- 20 --.

Claim 24, line 1, after "19" insert -- or --;  
line 2, delete "through", delete "23" insert  
-- 20 --.

Claim 25, line 1, after "19" insert -- or --;  
line 2, delete "through", delete "24" insert  
-- 20 --.

Claim 26, line 1, after "19" insert -- or --;  
line 2, delete "through", delete "25" insert  
-- 20 --.

Claim 36, line 1, after "32" insert -- or claim 33 --;  
line 2, delete "through 35".

Claim 37, line 1, after "32" insert -- or claim 33 --;  
line 2, delete "through 36".

Claim 38, line 1, after "32" insert -- or claim 33 --;  
line 2, delete "through 37".

Claim 43, line 2, delete "44" insert -- 42 --.

Claim 45, line 2, delete "44" insert -- 42 --.

Claim 46, line 2, delete "45" insert -- 42 --.

Claim 47, line 2, delete "46" insert -- 42 --.

Claim 51, line 1, after "48" insert -- or --;  
line 2, delete "through", delete "50" insert  
-- 49 --.

Claim 56, line 1, after "52" insert -- or --;  
line 2, delete "through", delete "55" insert  
-- 53 --.

Claim 61, line 2, delete "through" insert -- or --, delete  
"26" insert -- 20 --.

Claim 62, line 2, delete "47" insert -- 42 --.

#### REMARKS

Entry of this amendment prior to examination is respectfully requested.

By the present amendment, the claims have been amended to ensure proper multiple dependent format throughout.

To the extent necessary, the applicants petition for an extension of time under 37 CFR 1.136. Please charge any shortage in the fees due in connection with the filing of this

paper, including extension of time fees, to the deposit account of Antonelli, Terry, Stout & Kraus, LLP, Deposit Account No. 01-2135 (501.38642X00), and please credit any excess fees to said deposit account.

Respectfully submitted,

ANTONELLI, TERRY, STOUT & KRAUS, LLP



---

Gregory E. Montone  
Registration No. 28,141

GEM/vlc  
(703) 312-6600

009630 4960960

## SPECIFICATION

### TITLE OF THE INVENTION

LOW POWER CONSUMPTION MICROPROCESSOR

### FIELD OF THE INVENTION

This invention relates to a microprocessor, and relates in particular to a microprocessor technology suited for use in low power consumption microprocessors such as used in portable battery-powered electronic equipment such as PDA (personal digital assistant) and mobile computers, having a co-processor with custom circuits for particular applications such as a digital signal processor (DSP) or a floating-point processor unit (FPU)

### BACKGROUND OF THE INVENTION

Microprocessors in portable electronic equipment besides having a fast processing speed, must also have low power consumption to allow operation on battery power for long periods of time. Technology is known in the related art for using co-processors such as FPU (floating-point units) in microprocessors to attain fast processing speeds.

The following technology for low power consumption in microprocessors is also known in the related art.

Portable electronic devices are in standby for long periods of time so a low power (hereafter called power-saving mode) consumption mode is available for use while in standby so a method of the related art lowers the clock frequency used to operate the microprocessor during standby. More specifically, a clock divider lowers the clock frequency and supplies this frequency to the microprocessor when the lower power consumption mode is selected. The clock power consumption and the power used by transistor switching (per unit time) are thus reduced and the microprocessor thus achieves a state of low power consumption.

Another method, different from the method for lowering the clock frequency during standby, cuts off the supply of clock pulses to unused modules. The user break controller for instance, is a circuit for easy debugging of a program and so is not normally used during processor operation. Modules such as the user break controller which are not used during normal operation will not cause problems with operation even if the supply of clock pulses is cut off. This method for cutting off the supply of clock pulses is more effective than the method for lowering the clock frequency. As a specific measure to cut off the supply of clock pulses, unused modules are individually set in a control register for controlling the cutoff of the clock

pulses, when an instruction to halt the clock is issued in order to save power, the supply of clock pulses to the modules set in the control register is halted. The power consumption in the modules set in the control register therefore decreases to zero. To use a module set in the control register, the specified module is reset by an interrupt (break-in) and the supply of clock pulses restarted. However, this method for cutting off the supply of clock pulses to a module is costly in terms of time and effort involving operations such as setting values in the register, and is not suited for modules that must often be run or stopped.

A method is disclosed in Japanese Patent Prepublication No. 8-101820 for generating an NOP (No operation) control signal for stopping internal circuit operation of the data base when data base operation is to be halted in order to save power. In this method, instructions are decoded and when decoding results are that data base operation is not to be performed, a one bit NOP signal CC=1 is issued. The control signal is fixed when the NOP signal CC=1 is issued and the latch for the data base control signal cannot be rewritten (changed). The data base input/output (I/O) latch also cannot be rewritten (changed) and the input/output data is kept at the same values. The input/output data does not change at this time, so no



switching occurs in the data base and current consumption (power saving) can be achieved.

The method for generating an NOP (No operation) control signal for stopping internal circuit operation of the data base however had the following problems.

The NOP signal generation method was intended to reduce power consumption in the data base so there was no reduction in power consumed in the control section of the decoder. Besides controlling the issuing of instructions, the decoder control section, also performs tasks such as logic processing for generating control signals and non-routine (exceptional) task processing. The power consumption during these tasks cannot be ignored.

Adding a separate circuit as an energy conserving (power saving) circuit is also preferable from the viewpoint of IP (intellectual property) rights because using a separate circuit means there is no need to internally change a part functioning as a Co-processor and regarded as an intellectual property. The labor (man-hours) normally needed for verifying internal circuit changes in the IP (intellectual property) are therefore not required.

In view of the above problems with the related art, this invention has the object of providing a microprocessor achieving low power consumption with a simple structure by using an additional circuit to reduce

power consumption in data base sections and control sections such as the decoder.

These and other objects of the invention as well as the unique features of the invention will be clarified from the following description of this invention and from the drawings.

#### SUMMARY OF THE INVENTION

In order to achieve the above mentioned objects, the microprocessor of a typical embodiment of this invention is comprised of a discriminator circuit to accept instructions, an instruction selector circuit controlled by the discriminator circuit, an instruction decoder to decode the instructions, and a processing circuit to perform calculations according to the decoding results from the instruction decoder, wherein a first instruction is supplied to the instruction decoder when an instruction is input to the discriminator circuit that is different from the instruction to perform calculation in the processing circuit. Thus, when an unrelated instruction is input, the switching inside the decoder is decreased, the transistor switching is decreased, the through current in the transistors is decreased and the power consumption in the decoder is decreased.

Further, a microprocessor of another typical embodiment of this invention is comprised of a discriminator circuit to accept instructions, an instruction invalidation logic circuit controlled by the discriminator circuit, an instruction register to accept the instructions, an instruction decoder to decode the output of the instruction register, and a processing circuit to perform calculations according to the decoding results from the instruction decoder, wherein the supply of clock pulses to the instruction register is halted when the instruction invalidation logic circuit is input with an instruction different from the instruction to perform calculations in the calculation circuit. Thus, the operation of the instruction register stops, and no instructions are output to the instruction decoder from the instruction register. In other words, as related above, the electrical current through the transistors inside the decoder diminishes, and power consumption in the decoder is reduced.

Still further, a microprocessor of another typical embodiment of this invention is comprised of a discriminator circuit to accept instructions, an instruction invalidation logic circuit controlled by the discriminator circuit, a switching circuit to receive the instructions, an instruction decoder to decode the output of the switching circuit, and a processing circuit to

perform calculations according to the decoding results from the instruction decoder, wherein the switching circuit opens and stops the supply of instructions to the instruction decoder when the discriminator circuit is input with an instruction different from the instruction to perform calculations in the calculation circuit. The power consumption in the instruction decoder can therefore be reduced the same as previously described.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the structure of the low power consumption microprocessor of the first embodiment of this invention.

Fig. 2 is a drawing showing an instruction string forming the input of the instruction invalidation circuit of this invention.

Fig. 3 is a drawing showing an instruction string forming the output of the instruction invalidation circuit of this invention.

Fig. 4 is a drawing showing the invalidation circuit of this invention.

Fig. 5 is a timing chart for the structure shown in Fig. 1.

Fig. 6 is a block diagram showing the structure of the low power consumption microprocessor containing an

invalidation circuit utilizing an invalidation control register of the second embodiment of this invention.

Fig. 7 is a concept drawing showing the invalidation circuit utilizing an invalidation control register of this invention.

Fig. 8 is a block diagram showing the structure of the low power consumption microprocessor containing an invalidation circuit of the third embodiment of this invention.

Fig. 9 is a block diagram showing the structure of the low power consumption microprocessor containing an invalidation circuit of the fourth embodiment of this invention.

Fig. 10 is a block diagram showing the structure of the low power consumption microprocessor containing an invalidation circuit of the fifth embodiment of this invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Typical embodiments of this invention are hereafter described while referring to the accompanying work drawings.

Fig. 1 is a drawing showing the structure of the microprocessor and periphery. The microprocessor 101 is formed on one semiconductor substrate. The microprocessor

is connected to a data bus 4 and an address bus 5 by way of a BIU (bus interface unit) 6. The data bus 4 and the address bus 5 are connected to the main memory 3 shown in the drawing. The structure of the data bus and address bus allows connection to external data buses of other than the main memory however such a connection is omitted in these specifications. The data bus, address bus and main memory may be formed on the same substrate as the microprocessor if the degree of integration on the semiconductor device permits such integration.

Besides the above mentioned BIU6, the microprocessor also has a data cache 7, an instruction cache 8, a CPU (central processing unit) 1, a floating point unit 2, and a CPG (clock pulse generator) 18. The microprocessor in addition to the above components may also contain a DMAC (direct memory access controller) to control the memory however the DMAC is omitted from these specifications and work drawings.

The FPU (floating point unit) formed inside the microprocessor is a co-processor for centralized calculation of the floating decimal point. However, the co-processor formed inside the microprocessor is not limited to an FPU and may be a dedicated circuit other than an FPU, such as a DSP (digital signal processor) for supplementing CPU operation. Further, there are no

particular restrictions on this dedicated circuit, and the dedicated circuit may comprise a plurality of respective CPU that constitutes the microprocessor. In these specifications, the CPU of a plurality of CPU that make up the microprocessor may also be referred to as a co-processor provided that the circuit falls within the scope of this invention. In Fig. 1, the CPU and the FPU used as the co-processor are formed on the same semiconductor substrate but the co-processor may also be formed on a separate chip. The component mounting efficiency is lower when the co-processor is mounted on a separate chip however there is no need for a semiconductor device design for forming the CPU and the co-processor on the same chip, and to make production easier, a pre-existing co-processor chip can be connected to the CPU. In these specifications, for the sake of convenience, the CPU chip and the co-processor chip are together referred to as the microprocessor, even when the co-processor is mounted on a separate chip.

The program and data are stored in the main memory 3. The data bus 4 is a path for transferring data between the microprocessor and the memory. The address bus 5 is a path for transferring the address to the memory from the microprocessor when performing data transfer (exchange) between the microprocessor and memory. The BIU6 controls the address and data transfer between the main memory and

the external data bus. The data cache 7 stores processed data or data processed in the FPU and the CPU inside the microprocessor. The instruction cache 8 stores instructions executed in the CPU and FPU. The CPG18 generates operating clock pulses for the CPU and FPU.

The detailed structure of a CPU1 and an FPU2 are shown hereafter. The CPU receives the instruction IA and stores instruction IA in an instruction register 10. The FPU in the same way, accepts the instruction IA from the instruction cache and stores it in the instruction register 11. The CPU instructions and the FPU instructions are stored in the same instruction cache. Instructions output from the instruction cache are supplied in parallel to the instruction register on the CPU side and the instruction register on the FPU side. A splitting means can be implemented to divide into respective registers. One method for splitting (or branching) is simply to split the wiring layers formed of metal and silicon compounds on the semiconductor substrate into respective identical widths but there are no particular restrictions on the means to be used. A CPU instruction register 10 and an FPU instruction register 11 are edged trigger latches that change at the rising edge of the CLK1 pulse generated by the CPG18. However, as shown in the drawing, the instruction invalidation logic circuit 9 which is the unique feature of



this invention is formed between the instruction cache and the FPU side instruction register. The instruction invalidation logic circuit (abbreviated hereafter to invalidation circuit) is described later on. In the drawing, the instruction register 10 and the invalidation circuit are structured to receive instructions from the instruction cache but there are no particular restrictions, and a structure to receive the instructions directly from the memory may be used. The instruction register 11 of the FPU is formed inside the CPU however the instruction register 11 may be formed inside the FPU. When forming the FPU on the same semiconductor substrate as the CPU, or when connecting the FPU to the CPU as a separate chip the IP (intellectual property) differs according to whether or not an instruction register is formed in the FPU. Also, the invalidation circuit was formed on the CPU side, but when a co-processor other than the FPU is connected to the CPU, or when a FPU different from the previous one is connected, no modifications in the internal circuit of the FPU to be installed are needed if the invalidation circuit is inside the CPU, and adding the FPU is then simple. On the other hand if providing an FPU, then circuit modifications on the CPU side are not needed if an invalidation circuit is in the FPU circuit to be provided. In other words, changes can be made to form the invalidation circuit in either the CPU or

the co-processor according to design and customer needs, etc. However, when the invalidation circuit and the register are formed inside the FPU, the instructions can be supplied without using the CPU as a path but in this case also the instructions are supplied to the FPU via the CPU for purposes of convenience in these specifications. Also, instructions are latched in the register 11 by way of the invalidation circuit when the FPU receives instructions from the memory, however the order of the invalidation circuit and the register 11 may also be reversed. Forming the invalidation before the instruction register has advantages and will be related later on. As mentioned previously, the structure of the CPU or FPU can be changed by the forming of an invalidation circuit and register inside.

The instruction fetched to the CPU instruction register 10 is sent to the integer decoder 12 inside the CPU and the instruction decoded. The integer decoder 12 outputs the read/write control signal of the integer register 14. The output control signal from the integer decoder 12 is latched by the latch means 13, and output as a control signal for calculation processing performed in the ALU16 (arithmetic logic unit). Also, in an instruction unrelated to the CPU such as an NOP (No Operation) instruction, control is performed in order to save power, by not rewriting the

input latch 15 for the ALU and the output latch 17. More specifically, when the NOP instruction is not input into the integer decoder 12, the integer decoder 12 outputs a clock enable signal "0" (Here, "0" indicates disable.) to the input latch 15 of the ALU and the output latch 17, and rewriting of the latches is prevented by stopping the clock pulses. The instruction fetched to the FPU instruction register 11 on the other hand, is sent from the CPU model to the FPU module to be decoded with the floating-point decoder 19. The floating-point decoder 19 outputs the read/write control signal for the floating point unit 21. The floating point unit 21 holding the floating point data and the floating point calculation results, in compliance with the control signal CA, outputs data InA to the latch 22 and the data is latched. The data latched in the latch 22 is input to the floating-point data path 23 which is the calculation section. The control signal output from the floating-point decoder 19 is latched in the latch 20, and the contents of the latch 20 are output as a control signal CB on the floating-point data path. The latches 22 and 20 are edged latches that change with the rising edge of the CLK2 pulse output by the CPG18. The floating-point data path 23 is input with the data for calculating the floating point output by means of the latch 22, and the results of the floating point calculation OA are latched by the latch 24.

The latch 24 is an edged latch that changes with the rising edge of the CLK1 pulse. The output OB from the latch 24 is input to the register 21 and the calculation results are written in the register. A data path input latch 22 and a data path output latch 24 are respectively controlled so that the latches are rewritten by the latch enable signals EA or EB. These latch enable signals EA and EB are respectively generated from the outputs of the floating-point decoder and the floating-point decoder latch. When the instruction input to the floating-point decoder is an NOP instruction then  $EA = EB = 0$  is output from the decoding, and the supply of clock pulses to the floating-point data path input latch is stopped by a logic AND operation with the clock signal. When the instruction is not a NOP signal,  $EA = EB = 1$  is output and clock pulses are supplied to the floating-point data path input latch. The integer decoder and the floating-point decoder mentioned above are decoders generally referred to as instruction decoders. An instruction decoder generates a signal for controlling devices such as latch circuits for latching data output from processors input from other processors (calculating units) and processors receiving instructions from the instruction register.

The instruction invalidation logic circuit (or invalidation circuit) 9 inside the CPU module and a unique

feature of this invention is described next. An instruction loaded from the instruction cache as described above, is fetched to the CPU instruction register 10 and simultaneously input to the invalidation circuit of the FPU. In this case, when instructions relating only to the CPU and not relating to the FPU are loaded (read - out) from the instruction cache, the invalidation circuit 9 outputs a NOP instruction for the FPU instruction register. In other words, when an instruction does not relate to the FPU, an NOP instruction is fetched to the FPU instruction register. NOP instructions are constantly fetched to the FPU instruction register when instructions not relating to the FPU are continuously sent from the instruction cache. The floating-point decoder 19 of the FPU module therefore performs decoding only of continuous NOP instructions, while instructions not relating to the FPU are being processed in the CPU. In other words, since no switching operations are being performed in the decoder, no through-current from switching operation flows in the circuit, and low power consumption can be achieved.

Also, in the NOP instruction, a latch enable signal EA or EB are utilized to keep the floating-point data path input latch 22 and the output latch 24 from being rewritten, so that when the NOP instruction is continuous, the decoding control signals CA and CB are a fixed level,

and switching of the latches will not be performed. The input/output data InB and OB for the data path are also made a fixed level so that the input/output latches for the data path will not be rewritten. The input data and the control signal do not change at this time so that no switching is performed on the data path and low power consumption is possible.

A typical instruction code string output to the CPU from the instruction cache of Fig. 1 is shown in Fig. 2. The operation of the instruction invalidation circuit connected to the floating-point register utilizing the instruction code string is shown. The integer instruction (CPU instruction) and the floating point calculation instruction (FPU instruction) are both present in the instruction code string of Fig. 2. As shown in the figure, the CPU instruction and the FPU instruction in a mixed state are sent in sequence to the CPU from the instruction cache. In the above described instruction invalidation circuit, an instruction unrelated to the FPU is substituted for an invalid NOP instruction from among the instruction code strings shown in Fig. 2 sent from the instruction cache. The substituted instruction code string is shown in Fig. 3. In other words, the instruction code string shown in Fig. 2 is input to the CPU instruction register 10 of Fig. 1; and the instruction code string of Fig. 3 is input to the FPU

instruction register 11 of Fig. 1. The 1st and the 4th FPU instructions of the instruction code string of Fig. 2, are output unchanged to the FPU instruction register, and the other CPU instructions are output to the FPU register holding commands uniformly substituted into NOP instructions.

Fig. 4 shows in more detail the structure of the instruction invalidation circuit for processing the instructions that are input. The instructions respectively sent from the instruction cache are listed in the instruction code format shown in the figure. When the two sections with the slanted lines in the instruction code simultaneously satisfy respectively condition A and condition B, that instruction is assumed to be an FPU instruction. When the instruction code 401 is input to the instruction invalidation circuit, the comparators 402, 403 determine whether the slanted line sections satisfy condition A and condition B. The outputs of the comparators are summed by the AND gate 404 and a determination made as to whether the instruction code 401 that is input is an FPU instruction or not. When the condition A and the condition B are both present, the instruction code 401 input into the instruction invalidation circuit, is selected by the selector 405, and then output to the FPU instruction register as the instruction invalidation circuit output.

When the condition A and condition B are not present (not satisfied), the instruction that is input is determined to be an instruction unrelated to the FPU, and the instruction invalidation circuit outputs an NOP instruction to the FPU instruction register. In some cases, whether or not an instruction is an FPU instruction can be determined according to the instruction format, by referring to one bit of the instruction code. In such cases, the comparators of Fig. 4 are unnecessary, and the instruction invalidation circuit can be configured with a control signal from the selector, with one bit showing whether or not the instruction is an FPU instruction. The structure of the invalidation circuit for processing the instructions is limited by the type of instructions controlling the FPU, from among the instruction codes of the microprocessor, however various adaptations are allowable providing these variations do not depart from the scope and spirit of the invention.

In this embodiment, the instruction invalidation circuit is formed between the instruction cache and the instruction register, however there are no particular restrictions and the instruction invalidation circuit can for example be formed inside the floating-point decoder. In this case, the invalidation circuit 9 of Fig. 1 is formed inside the floating-point decoder 19. In this case also,



the invalidation circuit determines based on the specified bit of instruction code 401, whether or not the instruction input for decoding is an FPU instruction or not, and if the instruction that is input is an FPU instruction then it is decoded and FPU calculation performed. On the other hand, when determined by means of the specified bit that the instruction that is input is not an FPU instruction, an NOP instruction is output for the instruction decode means.

The power saving (low power consumption) feature of the floating point unit achieved by means of the instruction invalidation circuit of Fig. 1 is shown by using the timing chart of Fig. 5. The instruction string fetched from the instruction cache is identical to that in Fig. 2. The operation for the floating point instruction is explained first. Here, the input and output for the floating point invalidation circuit are respectively IA and IB. The CPU instruction is substituted with an NOP instruction, and the FPU instruction is output unchanged so that IB becomes the same instruction string as in Fig. 3. The output IB is input to the FPU instruction register 11 and the instruction code IC is output. When IC is the FPU1 instruction (time = 3, 3 in Fig. 5), the floating-point decoder 19 outputs an FPU1 instruction control signal fpu\_cont1 as the control signal CA for performing FPU1 calculation at time = 3 with the floating-point data path circuit. When the control

signal CA is fpu\_cont1, the input data input1 is loaded (read out) from the floating-point register 21 at time = 3, and output to the latch 22. After the floating-point data path control signal CB is latched in the control signal latch 20, an FPU1 instruction control signal fpu\_cont1 is output. On the data path for the floating point, since the input latch 22 of the enable signal EA = 1 and the output latch 24 of the enable signal EB = 1, with the input InB as input1 at time = 4, FPU1 calculation is performed in the floating-point data path circuit, the output latch 24 latches with the output1 result, and is output as OB time = 5.

The CPU instruction operation for the FPU is next described. The input and output for the floating point invalidation circuit are respectively IA and IB. The CPU instruction is substituted with an NOP instruction the same as in Fig. 3. The floating-point register 11 is input with IB, and outputs an instruction code IC. When the IC is an NOP instruction (time = 5), the floating-point decoder 19 outputs a control signal cont\_NOP at time = 5, as the control signal CA so that calculation will not be performed. InA is read out from the floating-point register file 21 by means of the control signal CA, and input to the latch 22. When the control signal CA is a cont\_NOP, the register value is read out from the instruction code of the NOP instruction, and the input value becomes input\_NOP. The clock signal of

the floating-point data path input latch 22 is summed by logic AND operation with the CLK2 and enable signal EA from the CPG, and unrelated latches are not rewritten in the calculation. In the case of a NOP instruction, the control signal CA is a cont\_NOP, and EA = 0. The output of the latch 22 or in other words InB is not rewritten.

In other words, during a NOP instruction (time = 6 through 9), the InB output of the latch 22 is input1 the same as the FPU1 instruction. Since the latch 20 is constantly rewritten, the floating-point data path control signal outputs a cont\_NOP in the case of an NOP instruction. The input of the floating-point data path circuit 23 is InB and the control signal is CB, so the input is input1 and the time = 4 the same as the FPU1 instruction however the control signal is different from FPUcont\_1 to cont\_NOP so that the output OA is time = 6 through 9 and output1\*. The clock signal for the output latch 24 of the floating-point data path is summed by logic AND operation of CLK1 and the enable signal EB, so that unrelated latches are not rewritten in the calculation, the same as with floating-point data path input latch 22. During the NOP instruction, at time 6 through 9, EB = 0, so output OB of the non-rewritten latch 24 is fixed at output1.

When the CPU instructions are continuous as above, they are substituted with continuous NOP

instructions in the invalidation circuit, and the floating-point data path input InB and the data path control signal CB are fixed, and switching of the data path circuit is not performed. Also, the floating point decode input IC is fixed, and switching is not performed in the floating-point register and the floating-point decoder. A reduction in power consumption can therefore be achieved in the data path circuit, the floating-point decoder and the floating-point register. The number of switchings occurring in the floating-point data path input/output latch 22, 24 is reduced, even if the FPU instruction and CPU instructions are alternately arrayed and low power consumption can be achieved.

The instruction invalidation circuit of this invention may be installed in a prestage of the instruction register, and no internal changes made in the FPU.

Another embodiment of this invention is shown in Fig. 6. In this embodiment, the invalidation circuit is comprised of an invalidation control register, instead of the decode method of Fig. 1. More specifically, in a microprocessor having an FPU (floating point unit) the low power consumption feature (or power device) of the floating point unit is comprised of an invalidation circuit utilizing an invalidation register. In the unique feature of this embodiment shown in Fig. 6, in contrast to the structure

shown in Fig. 1, the invalidation circuit is controlled by providing an invalidation register to determine whether each module is valid or invalid. The instruction code invalidation circuit 9 for the module set to invalid (1) in the invalidation control register 51, is set to active. If the invalidation control register is rewritten by the software, then the instruction codes of the modules can be set to invalid with the software. The point of difference of the embodiment of Fig 1 with the embodiment of Fig. 6 is that the embodiment of Fig. 1 detects instructions unrelated to the FPU module, and substitutes these unrelated instructions in the module with NOP instructions, while for input of the instruction register, in the embodiment of Fig. 6, in the module set to invalid in the invalidation control register, the instruction codes are replaced unconditionally with NOP instructions, and the inputs set for the instruction register.

The structure of the instruction invalidation circuit of Fig. 6 is shown in Fig. 7. An instruction code 702 is input from the instruction cache, and the output from the invalidation control register 701 is set as the selector control signal, and when the module in the invalidation control register is set to invalid (1), an NOP instruction is selected with the selector 703, and when the module is set to valid (0), the instruction code is selected, and

becomes the instruction invalidation circuit output 704. Other sections of the circuit are identical to Fig. 1, and the timing chart is identical to Fig. 5. The embodiment of Fig. 6 has a simple instruction invalidation circuit compared to the embodiment of Fig. 1 however the related overhead increases due to changes in the invalidation instruction register. Of course, the embodiment of Fig. 6 and the embodiment of Fig. 1 can also be combined. More specifically, when the module was set to invalid in the invalidation control register, just as with the embodiment of Fig. 6, NOP instructions are unconditionally output to the applicable module. However, when the module in the invalidation control register was set to valid also, just as with the embodiment of Fig. 1, then unrelated instructions in the applicable module are output as NOP instructions to the applicable module. The circuit configuration is complex in this type of structure but finer low power consumption control is possible.

A third embodiment of this invention of a microprocessor having a co-processor 71 is shown in Fig. 8. Compared to Fig. 1, the unique feature of the embodiment shown in Fig. 8 is that a decoder 19 for the co-processor is provided inside the CPU module. Instructions unrelated to the co-processor 71 are substituted with NOP instructions in the invalidation circuit and output to the co-processor

decoder. Instructions unrelated to the co-processor, in other words, NOP instruction are continuous and the power consumption in the decoder is reduced. Also, the control signal of the co-processor 62 are fixed, and since the latch 61 of the co-processor 61 is not rewritten, the switching count of the latch 61 decreases, and the power consumption can also be reduced. The same structure as for the co-processor invalidation circuit of Fig. 4 can be used. In this embodiment, an instruction decoder is not provided inside the co-processor module so that when using a co-processor as an IP (intellectual property) a wide range of selections for an IP are available compared to the first embodiment.

The fourth embodiment of this invention is shown in Fig. 9. The unique feature of the embodiment shown in Fig. 9, in contrast to the microprocessor having the co-processor 71 in Fig. 8, is that an invalidation control register is provided for determining whether each module is valid or invalid, and to control the invalidation circuit. The circuit structure of the invalidation circuit is the same as in Fig. 7. The design of the invalidation circuit is simple compared to that of Fig. 8 however, the overhead becomes larger due to making changes in the invalidation instruction register.

Another embodiment is shown in Fig. 10. As with the other embodiments, the invalidation circuit outputs NOP instructions however output of other than NOP instructions is possible. More specifically, the supply of clock pulse to the register 11 can be stopped. If the supply of clock pulses was cut off to the register 11 instead of outputting NOP instructions, then changes will not be possible in the instructions being supplied to the decoder. In other words, if instructions input to the invalidation circuit are instructions unrelated to the FPU, then control signals are output by the control circuit. The input of control signals from the control circuit stops the supply of clock pulse to the register 11. The instructions supplied to the decoder are therefore fixed, the switching count (amount of switching) inside the decoder decreases, and power consumption in the decoder is reduced. In this case, with the supply of clock pulses stopped to the registers 20, 22, and 24 when NOP instructions are input to the decoder, the state is therefore the same as when NOP instructions are supplied to the decoder so that the supply of clock pulses to the registers 20, 22, and 24 can also be stopped. The power consumption can therefore decrease in the registers 20, 22, and 24. The control circuits are formed between CPG18 and the registers and each latch. A control circuit



was formed on the FPU module side but of course, may also be formed on the CPU side.

Also, though not shown in the drawing, a further embodiment is possible. For example when the FPU is input with an instruction unrelated to the FPU, the supply of instructions to the decoder can be stopped. More specifically, a method can be used in which a cutoff circuit is formed in a prestage of the decoder, and when instructions unrelated to the FPU are input to the invalidation circuit, the connection between the decoder and register, or between the register and invalidation circuit can be opened by the cutoff circuit. This method is more reliable for stopping the decoder operation. Further, by forming the cutoff circuit prior to instruction register, the power consumption in the instruction register can also be reduced. This embodiment also specifically mentioned the NOP instruction as one of the instructions however this is not to say the NOP is specially designated as an instruction. When an instruction unrelated to an FPU instruction for instance, is input to the invalidation circuit, all such instructions can be supplied to the decoder as a "1" code, by the selection means. The amount of switching (or switching count) of the decoder also decreases in this case, and the power consumption in the decoder can be reduced. Of course, a "0" can be used rather than a "1", and other codes

can also be designated. Also, during fixed decoding when an instruction other than an FPU instruction is input, the FPU instruction code can be referred to, and the code most capable of reducing the switching count can be calculated by simulation or similar method and that code then also be supplied to the invalidation circuit by the decoder. This method has a larger effect in reducing power consumption.

In the above embodiment, the instruction invalidation circuit was formed prior to the decoder of the co-processor, more specifically on the FPU side, however the invalidation circuit may also be formed in a prestage of the decoder on the CPU side. A NOP instruction can thus be supplied to the CPU instruction register, while an instruction unrelated to the CPU, in other words, a co-processor instruction is handled in the co-processor. Here, the switching count (or amount of switching) by the integer decoder of the CPU can decrease, and reduced CPU power consumption can also be achieved. An even further reduction in power can be anticipated by fixing the data path latches on the CPU side. Also, by using this method along with the method for stopping the decoding in the co-processor decoder an even further reduction in power consumption can be expected. Further, by forming the invalidation circuits of this invention in a plurality of instruction decoders, in a microprocessor comprised of a combination of a plurality

of CPU and a plurality of co-processors, the power consumption of these respective processing devices can be reduced, and an overall reduction in power consumption can be achieved. This invention is also applicable to a single CPU.

This embodiment further described stopping the switching in the decoder by means of consecutive NOP instructions but may also include the case when the amount of switching is reduced compared to when an unrelated instruction is input to the processing device. A method may function so that when instructions unrelated to the processor are input to the invalidation circuit, a first instruction is converted to a NOP 1 instruction, a second instruction to a NOP2 instruction, a third instruction is converted to a NOP3 instruction, and a fourth instruction is converted to a NOP1 instruction again, so that even if just decoders with few transistors are operated, a reduction in power consumption can be expected compared to when unrelated instructions are input into the decoder. In other words, these instructions are also essentially handled as the NOP instructions described in these specifications. Of course, a "1" or a "0" conforming to the NOP instructions or fixed instructions such as instructions determined based on Co-processor instructions can be used in the same way.

Specific embodiments of the invention were related however this invention is not limited by these specific examples, and various embodiment for reducing power consumption in the decoder are applicable within the spirit and scope of this invention.

Further, by installing the above described microprocessor in portable electronic equipment driven by batteries such as portable telephones and PDA and mobile computers, the power consumption of the portable electronic equipment can be reduced, the operating time on these batteries can be extended and the convenience and functions of this portable electronic equipment improved.

The microprocessor of the above described invention having an FPU, substitutes instructions unrelated to the FPU, with uniform NOP instructions and supplies these NOP instructions to the FPU, by means of the invalidation circuit of this invention. In this way, when input with instructions unrelated to the FPU, the NOP instructions are supplied to the FPU instruction decoder, the amount of transistor switching performed in the floating point decoder is reduced, and a reduction in power consumption can be achieved. In the same way, in a microprocessor having a co-processor, the power consumption of the co-processor can be reduced by means of the invalidation circuit of this invention. Also, for the CPU, by providing an instruction

invalidation circuit in a prestage of the CPU instruction decoder, instructions unrelated to the CPU, such as floating point calculation instructions can be substituted with NOP instructions and the power consumption reduced in the CPU instruction decoder for the same reasons. These instruction invalidation circuits can also be configured as additional circuits so that modifications of the interior of the FPU or the co-processor are not required. Therefore, not only can the amount of man-hours required for checking and verifying new designs be reduced but already existing circuits can be utilized.

Furthermore, by incorporating the microprocessor of this invention into microprocessor systems such as portable information devices, low power consumption can be achieved in portable electronic devices, etc.

WHAT IS CLAIMED IS:

1. A microprocessor comprising an instruction processor, an instruction decoder to decode the output from said instruction processor, and a processor to make calculations according to the output from said instruction decoder, wherein when the instructions that are input are specified instructions said instruction processor outputs said input instructions to said instruction decoder, and when the input instructions are other than said specified instructions, a first instruction different from said input instructions is output to said instruction decoder.

2. A microprocessor according to claim 1, wherein said instruction processor has an instruction discriminator circuit and an instruction selector circuit, and said discriminator circuit determines whether or not the instruction input into said instruction processor is said specified instruction, and based on said discrimination results, said instruction selector circuit selects either said first instruction or said input instruction and outputs either said first instruction or said input instruction to said instruction decoder.

3. A microprocessor according to claim 1 or claim 2, wherein said specified instruction is an instruction to perform calculations in said processor.

4. A microprocessor according to claim 1 through claim 3, wherein said first instruction is an NOP instruction.

5. A microprocessor according to claim 1 through claim 3, wherein said first instruction is an instruction for a designated code.

6. A microprocessor according to claim 1 through claim 5, wherein said processor is a processor for a designated processing circuit.

7. A microprocessor according to claim 6, wherein said designated processor is a floating point unit.

8. A microprocessor according to claim 1 through claim 7, wherein said processor calculates the data stored in a first latch and outputs said calculated results to a second latch, and the supply of clock pulses to said first latch and said second latch is halted when said first instruction is input to said instruction decoder.

9. A microprocessor according to claim 1 through claim 8, further comprising a second register to receive instructions, a second instruction decoder connected to said second register, and a second processor controlled by the output of said second instruction decoder, wherein the instruction supplied to said instruction processor circuit and the instruction input to said second register are the same instruction.

10. A microprocessor according to claim 1 through claim 9, wherein said microprocessor is formed on the same semiconductor substrate.

11. A microprocessor comprising an instruction processor circuit input with instructions, an instruction register to receive the output of said instruction processor circuit, an instruction decoder to decode the output of said instruction register, and a processor to perform calculations according to decoded results from said instruction decoder, wherein said instruction processor circuit halts the supply of clock pulses to said instruction register when the instructions that were input are other than the specified instructions.



12. A microprocessor according to claim 11, comprising an instruction discriminator circuit, and a control circuit to supply clock pulses to said instruction register, wherein said instruction discriminator circuit determines whether or not the instruction input to said instruction processor circuit is said specified instruction and outputs said discrimination results to said control circuit, said control circuit, based on said discrimination results, stops the supply of clock pulse to said instruction register when an instruction other than the specified instruction was input.

13. A microprocessor according to claim 11, comprising an instruction discriminator means and a control means, wherein said instruction discriminator means determines whether or not the instruction input to said instruction processor circuit is said specified instruction and outputs said discrimination results to said control means, and said control means based on said discrimination results, stops the supply of clock pulse to said instruction register when an instruction other than the specified instruction was input.

14. A microprocessor according to claim 11 through claim 13, wherein said specified instruction is an instruction to perform calculations in said processor.

15. A microprocessor according to claim 11 through claim 14, wherein said processor is a processor for a designated processing circuit.

16. A microprocessor according to claim 11 through claim 15, wherein said processor performs calculations of data stored in a first latch and outputs said calculated data to a second latch, and the supply of clock pulses for said first latch and said second latch is stopped when an instruction other than the specified instruction was input to said instruction processor circuit.

17. A microprocessor according to claim 11 through claim 16, further comprising a second register to receive instructions, a second instruction decoder connected to said second register, and a second processor controlled by the output of said second instruction decoder, wherein the instruction supplied to said instruction processor circuit is the same as the instruction input to said second register.

18. A microprocessor according to claim 11 through claim 17, wherein said microprocessor is formed on the same semiconductor substrate.

19. A microprocessor comprising an instruction processor circuit, an instruction decoder to decode the output of said instruction processor circuit and a processor to make calculations according to decoding results from said decoder, wherein when the instruction that is input is other than the specified instruction, said instruction processor circuit does not supply to said instruction decoder the instruction that is input.

20. A microprocessor according to claim 19, comprising an instruction processor circuit, an instruction discriminator circuit and switching circuit, wherein said instruction discriminator circuit determines whether or not the instruction input to said instruction processor circuit is said specified instruction and outputs said discrimination results to said switching circuit, and based on said discrimination results, opens the electrical connection between said discriminator circuit and said instruction decoder when an instruction other than the specified instruction was input.

21. A microprocessor according to claim 19 or claim 20, wherein said specified instruction is an instruction to perform calculations in said processor.

22. A microprocessor according to claim 19 through claim 21, wherein said processor is a processor for a designated processing circuit.

23. A microprocessor according to claim 22, wherein said designated processor is a floating point unit.

24. A microprocessor according to claim 19 through claim 23, wherein said processor performs calculations of data stored in a first latch and outputs said calculated data to a second latch, and the supply of clock pulses for said first latch and said second latch is stopped when an instruction other than the specified instruction was input to said instruction processor circuit.

25. A microprocessor according to claim 19 through claim 24, further comprising a second register to receive instructions, a second instruction decoder connected to said second register, and a second processor controlled by the output of said second instruction decoder, wherein the instruction supplied to said instruction

processor circuit is the same as the instruction input to said second register.

26. A microprocessor according to claim 19 through claim 25, wherein said microprocessor is formed on the same semiconductor substrate.

27. A microprocessor comprising an instruction processor circuit input with instructions from the memory, a first decoder to decode the output of said instruction processor circuit, a first processor to make calculations according to decoding results from said first decoder, a second decoder to decode the output from said instruction processor circuit, and a second processor to calculate the output according to decoding results from said second decoder, wherein when the instruction that is input is not the instruction to perform calculations in said second processor, the power consumption by said second decoder is reduced versus the power consumption of said first decoder.

28. A microprocessor according to claim 27, wherein when the instruction input to said instruction processor circuit is not the instruction to perform calculations in said second processor, an instruction is

output for said second decoder that is different from the instruction that is input.

29. A microprocessor according to claim 28, wherein said different instruction is an NOP instruction.

30. A microprocessor according to claim 27, comprising an instruction register between said second decoder and said instruction processor circuit, wherein when the instruction input to said instruction processor circuit is not the instruction to perform calculations in said second processor, said instruction processor circuit stops the supply of clock pulses to said instruction register.

31. A microprocessor according to claim 27, comprising a switching circuit between said second decoder and said instruction processor circuit, wherein when the instruction input to said instruction processor circuit is not the instruction to perform calculations in said second processor, said instruction processor circuit controls said switching circuit, and opens the connection between said instruction processor circuit and said second decoder.

32. A microprocessor comprising an instruction processor circuit, a first decoder to decode the output of said instruction processor circuit, a first processor to make calculations according to the decoding results from said first decoder, a second decoder to decode the output from said instruction processor circuit, and a second processor to make a calculation according to decoding results from said second decoder, wherein when the instruction that is input is not the instruction to perform calculations in said second processor, an instruction is output for said second decoder that is different from the instruction that is input.

33. A microprocessor according to claim 32, wherein said different instruction is an NOP instruction.

34. A microprocessor according to claim 32 or claim 33, wherein said first processor is an arithmetic logic unit, and said second processor is a processor with a designated calculator circuit.

35. A microprocessor according to claim 34, wherein said designated calculator circuit is an FPU.

36. A microprocessor according to claim 32 through 35, wherein said second processor calculates the data stored in the first latch, and outputs the calculation results to the second latch and,

when the instruction input to said instruction processor circuit is not the instruction to perform calculation in said second processor, said instruction processor circuit stops the supply of clock pulses to said first latch and to said second latch.

37. A microprocessor according to claim 32 through 36, wherein when the instruction input to said instruction processor circuit is not the instruction to perform calculation in said first processor, said instruction processor circuit does not output said input instruction to said first decoder.

38. A microprocessor according to claim 32 through 37, wherein said microprocessor is formed on the same semiconductor substrate.

39. A microprocessor comprising an instruction processor circuit, a first decoder to decode the output of said instruction processor circuit, a first processor to make calculations according to decoding results from said



first decoder, a second decoder to decode the output from said instruction processor circuit, and a second processor to make a calculation according to decoding results from said second decoder, wherein when the instruction input to said instruction processor circuit is not the instruction to perform calculations in said second processor, said instruction processor circuit does not output said input instruction to said second decoder.

40. A microprocessor according to claim 39, wherein when the instruction input to said instruction processor circuit is not the instruction to perform calculations in said second processor, said instruction processor circuit supplies an instruction different from the input instruction, to said second decoder.

41. A microprocessor according to claim 39, further comprising an instruction register with said second decoder input by the output of said instruction processor circuit, said instruction processor circuit further has a control circuit, wherein when the instruction input to said instruction processor circuit is not the instruction to perform calculations in said second processor, said control circuit stops the supply of clock pulses to said instruction register.

42. A microprocessor according to claim 39, further comprising a switching circuit with said second decoder input by the output of said instruction processor circuit, said instruction processor circuit further has a control circuit wherein, when the instruction input to said instruction processor circuit is not the instruction to perform calculations in said second processor, said instruction processor circuit controls the switching circuit, opening the connection between said instruction processor circuit and said second decoder.

43. A microprocessor according to claim 39 through claim 44, wherein said first processor is an arithmetic logic unit, and said second processor is a processor with a designated calculator circuit.

44. A microprocessor according to claim 43, wherein said designated calculator circuit is an FPU.

45. A microprocessor according to claim 39 through 44, wherein said second processor calculates the data stored in the first latch, outputs the calculation results to the second latch, and when the instruction input to said instruction processor circuit is not the instruction

to perform calculation in said second processor, the supply of clock pulses is stopped to said first latch and to said second latch.

46. A microprocessor according to claim 39 through 45, wherein when the instruction input to said instruction processor circuit is not the instruction to perform calculation in said first processor, said instruction processor circuit does not output said input instruction to said first decoder.

47. A microprocessor according to claim 39 through 46, wherein said microprocessor is formed on the same semiconductor substrate.

48. A microprocessor comprising an instruction processor means, a first decoder means to decode the output of said instruction processor means, a processor to make calculations according to decoding results from said first decoder means, wherein when the instruction input to said instruction processor means is other the specified instruction, said instruction processor means does not output said input instruction to said first decoder.

49. A microprocessor according to claim 48, wherein said specified instruction is an instruction for performing calculations in the processor for the designated calculator circuit.

50. A microprocessor according to claim 48 or 49, wherein said processor calculates the data stored in a first latch and outputs the calculation results to a second latch, and when the instruction input to said instruction processor means is other than said specified instruction, the supply of clock pulses to said first latch and said second latch is stopped.

51. A microprocessor according to claim 48 through claim 50, further comprising a second register to receive instructions, a second decoder means connected to said second register, and a second processor controlled by the output of said second decoder means, wherein the instruction supplied to said instruction processor circuit is the same as the instruction input to said second register.

52. A microprocessor comprising an instruction processor circuit input with instructions, a instruction decoder input with the output of said instruction processor

circuit, and a processor to make calculations according to decoding results from said instruction decoder, wherein

said instruction processor circuit has a selector circuit to select either a first instruction different from the input instruction or said input instruction, and a discriminator circuit input with a specified bit of said input instruction, and wherein

when said specified bit is a first status, said discriminator circuit controls said selector circuit and outputs said first instruction to said instruction decoder, and

when said specified bit is not a first status, said discriminator circuit controls said selector circuit to output said input instruction to said instruction decoder.

53. A microprocessor comprising an instruction processor circuit input with instructions, a instruction decoder input with the output of said instruction processor circuit, and a processor to make calculations according to decoding results from said instruction decoder,

said instruction processor circuit has a selector circuit to select either a first instruction different from the input instruction or said input instruction, and a control register, wherein

when said specified bit of said control register is a first status, said selector circuit is controlled to output said first instruction to said instruction decoder, and

when said specified bit of said control register is not a first status, said selector circuit is controlled to output said input instruction to said instruction decoder.

54. A microprocessor according to claim 52 or claim 53, wherein said first instruction is an NOP instruction.

55. A microprocessor according to claim 52 or claim 53, wherein said first instruction is a designated code.

56. A microprocessor according to claim 52 through claim 55, wherein said processor is the processor of a designated calculation circuit.

57. A microprocessor comprising an instruction processor circuit input with instructions, a instruction decoder input with the output of said instruction processor

circuit, and a processor to make calculations according to decoding results from said instruction decoder,

said instruction processor circuit has a discriminator circuit input with the specified bit of said input instruction, and a control circuit to receive the output of said discriminator circuit, wherein

when said specified bit is a first status, said discriminator circuit controls said control circuit to stop the operation of said first decoder.

58. A microprocessor comprising a clock control circuit, an instruction processor circuit input with instructions, an information register input with the output of said instruction processor circuit, an instruction decoder input with the output of said instruction register, and a processor circuit to make calculations according to decoding results from said instruction decoder,

said instruction processor circuit has a discriminator circuit input with the specified bit of said input instruction, and has a switching circuit to receive the output of said discriminator circuit connected to said instruction register and to the output of said clock control circuit, wherein

when said specified bit is a first status, said instruction processor circuit controls said switching

circuit to stop the supply of clock pulses to said instruction register.

59. A microprocessor comprising an instruction processor circuit input with instructions, a switching circuit input with the output of said instruction processor circuit, a instruction decoder input with the output of said switching circuit, and a processor to make calculations according to decoding results from said instruction decoder,

said instruction processor circuit has a discriminator circuit input with the specified bit of said input instruction, wherein

when said specified bit is a first status, said instruction processor circuit controls said switching circuit to open the connection between said instruction processor circuit and said instruction decoder.

60. A microprocessor according to claim 57 through claim 59, wherein said processor is the processor of a designated calculation circuit.

61. Portable electronic equipment installed with the microprocessor of claim 19 through claim 26,




wherein said portable electronic equipment is capable of operating on battery power.

62. Portable electronic equipment installed with the microprocessor of claim 39 through claim 47, wherein said portable electronic equipment is capable of operating on battery power.

ABSTRACT OF THE DISCLOSURE

A microprocessor to reduce wasteful power consumption of the floating-point unit. An instruction invalidation logic circuit is utilized to substitute the instruction not-to-use-the-floating-point unit, in the instruction string supplied from the instruction cache, with an invalidating instruction, hold that invalidating instruction in the floating-point register, and supply that invalidating instruction to a floating-point decoder in the floating-point unit. In cases when the invalidating instruction was continuous, the power consumption in the floating-point data path as well as the in the floating-point decoder and floating-point register is reduced.

FIG.1

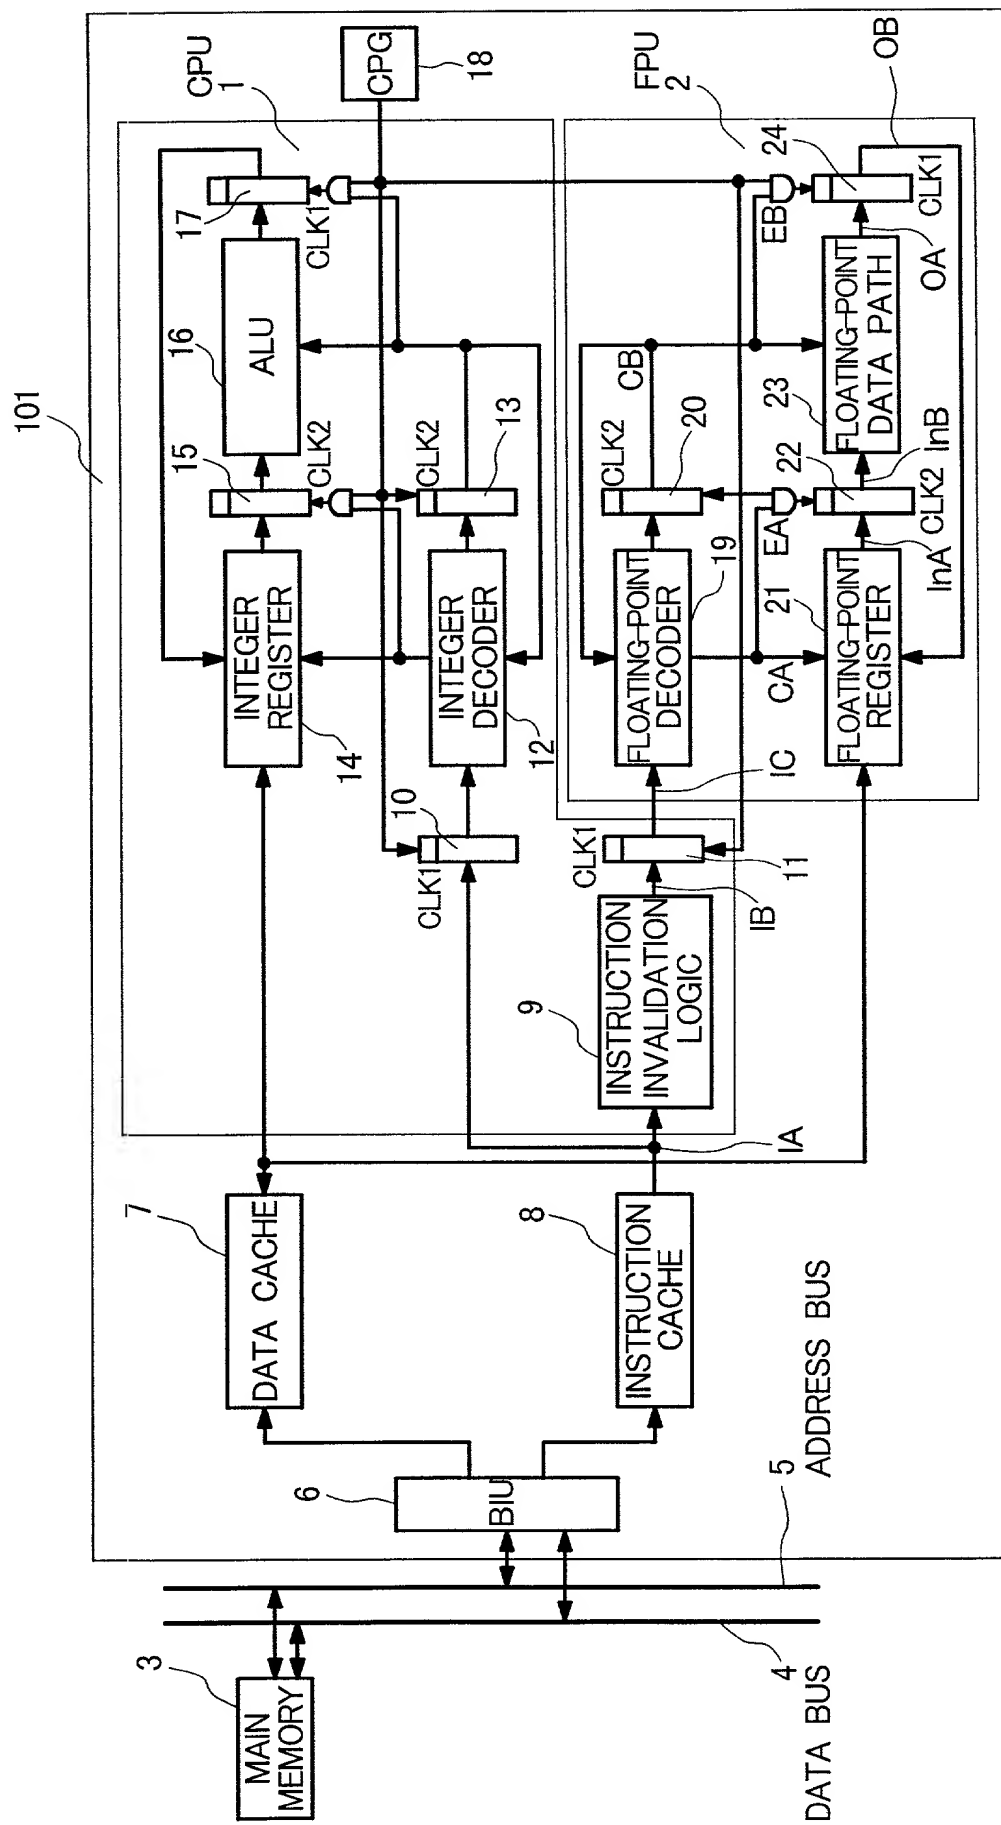


## FIG.2

1	FADD FR0 , FR1	; FPU INSTRUCTION	1
2	ADD R0 , R1	; CPU INSTRUCTION	1
3	SUB R2 , R3	; CPU INSTRUCTION	2
4	FDIV FR2 , FR3	; FPU INSTRUCTION	2
5	SHAD R4 , R5	; CPU INSTRUCTION	3
6	OR R6 , R7	; CPU INSTRUCTION	4


## FIG.3

1	FADD FR0 , FR1	; FPU INSTRUCTION	1
2	NOP	; CPU INSTRUCTION	1
3	NOP	; CPU INSTRUCTION	2
4	FDIV FR2 , FR3	; FPU INSTRUCTION	2
5	NOP	; CPU INSTRUCTION	3
6	NOP	; CPU INSTRUCTION	4

## FIG.4

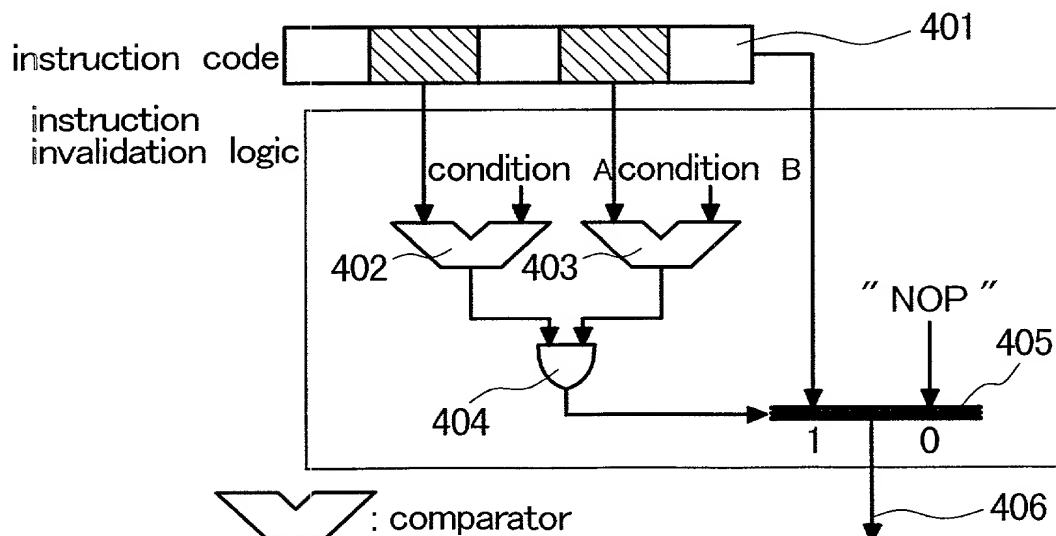

# FIG.5

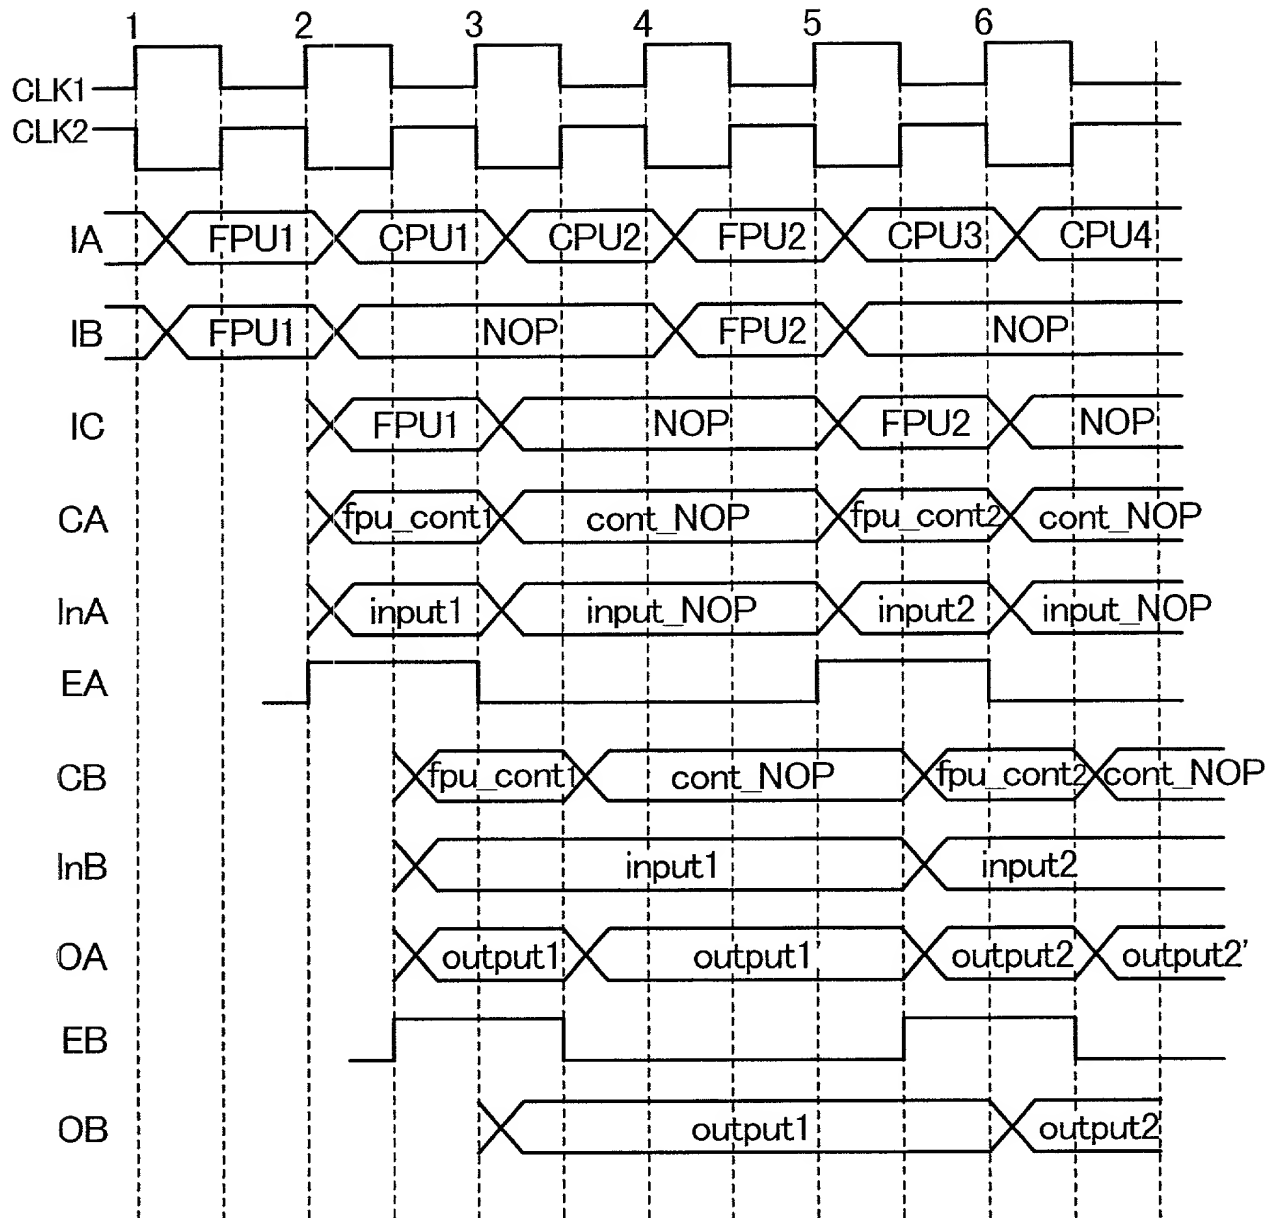

# FIG.6

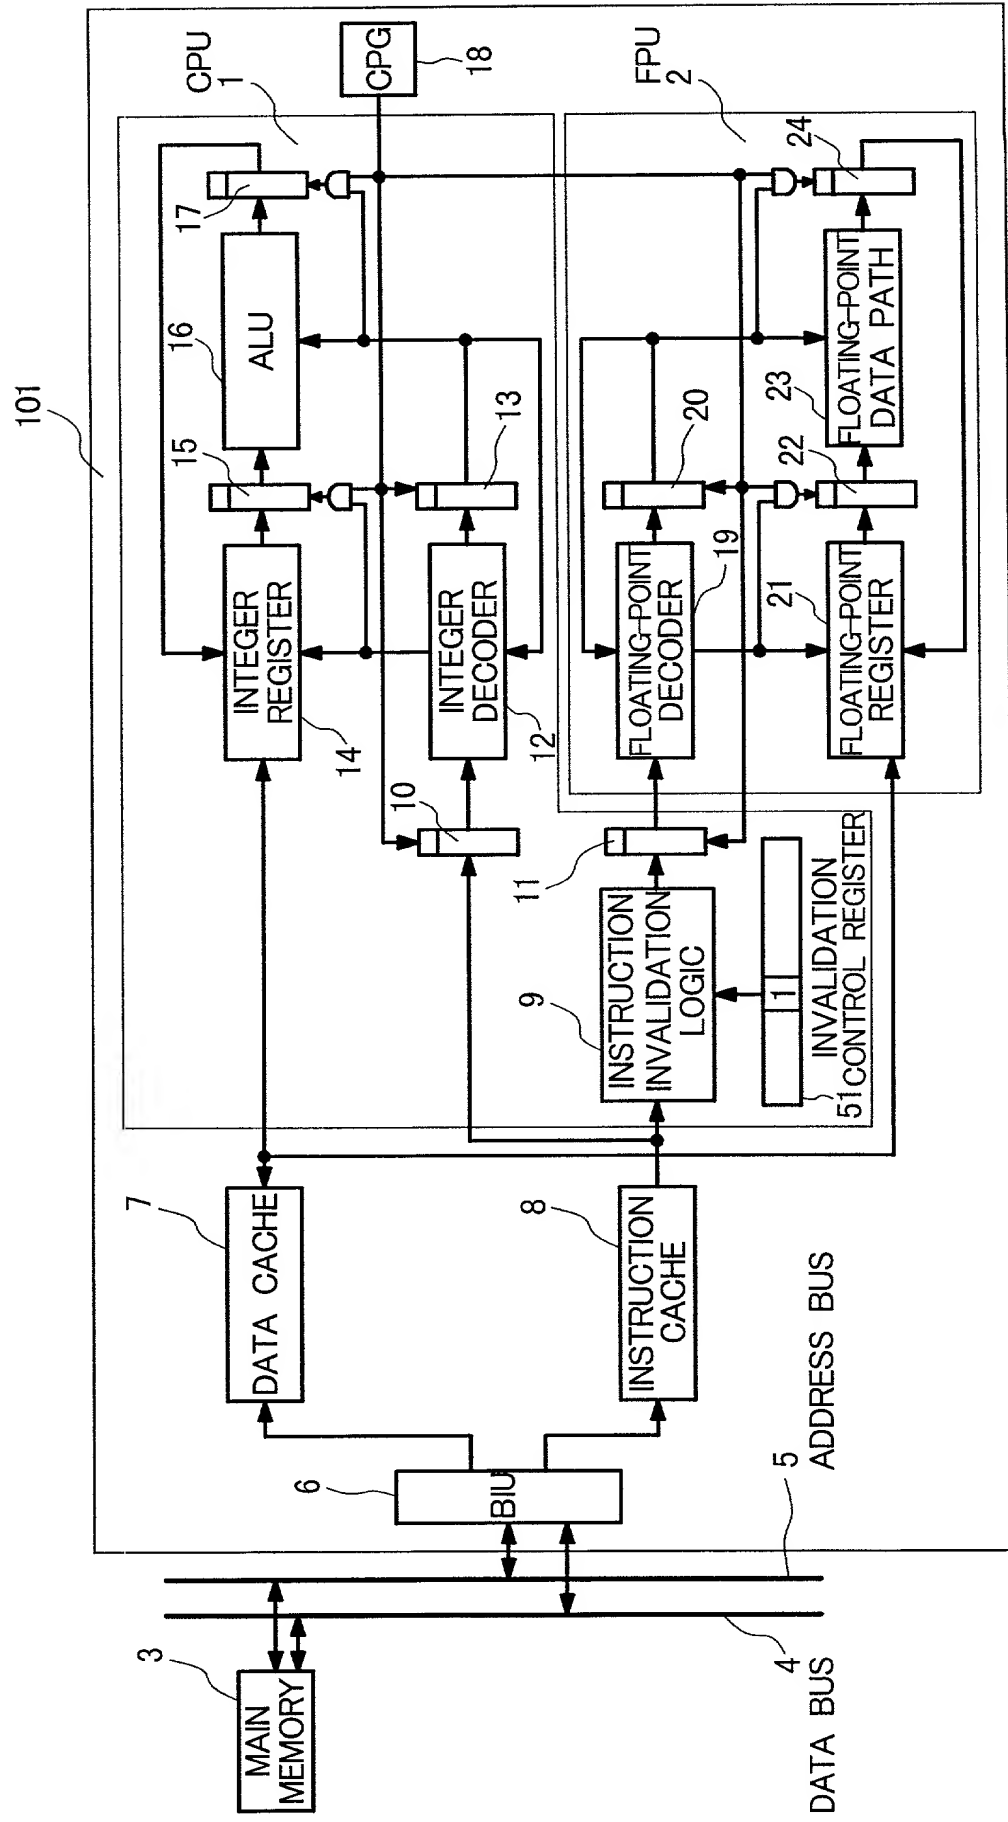


FIG.7



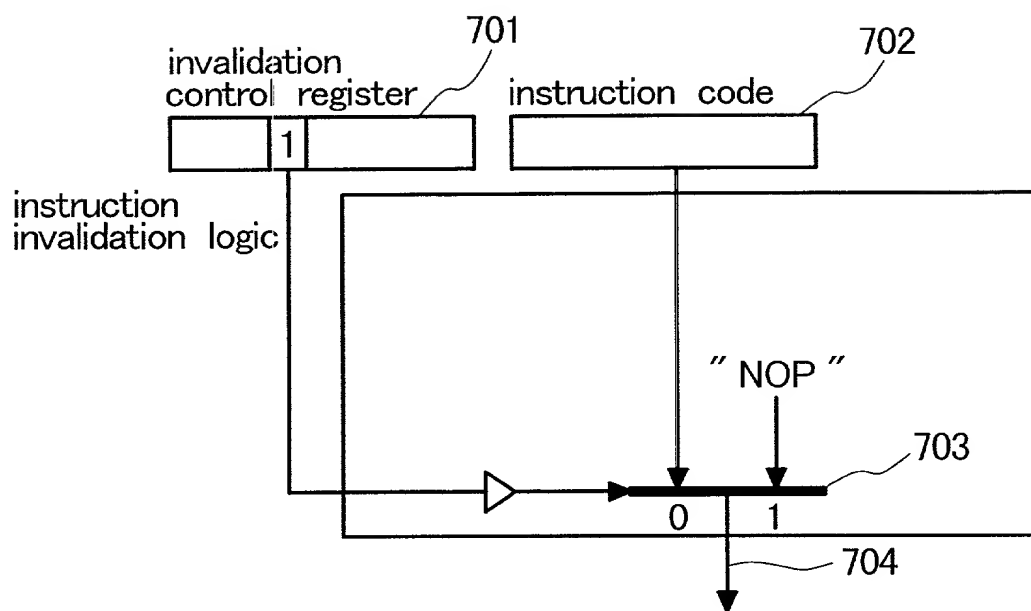


FIG.8




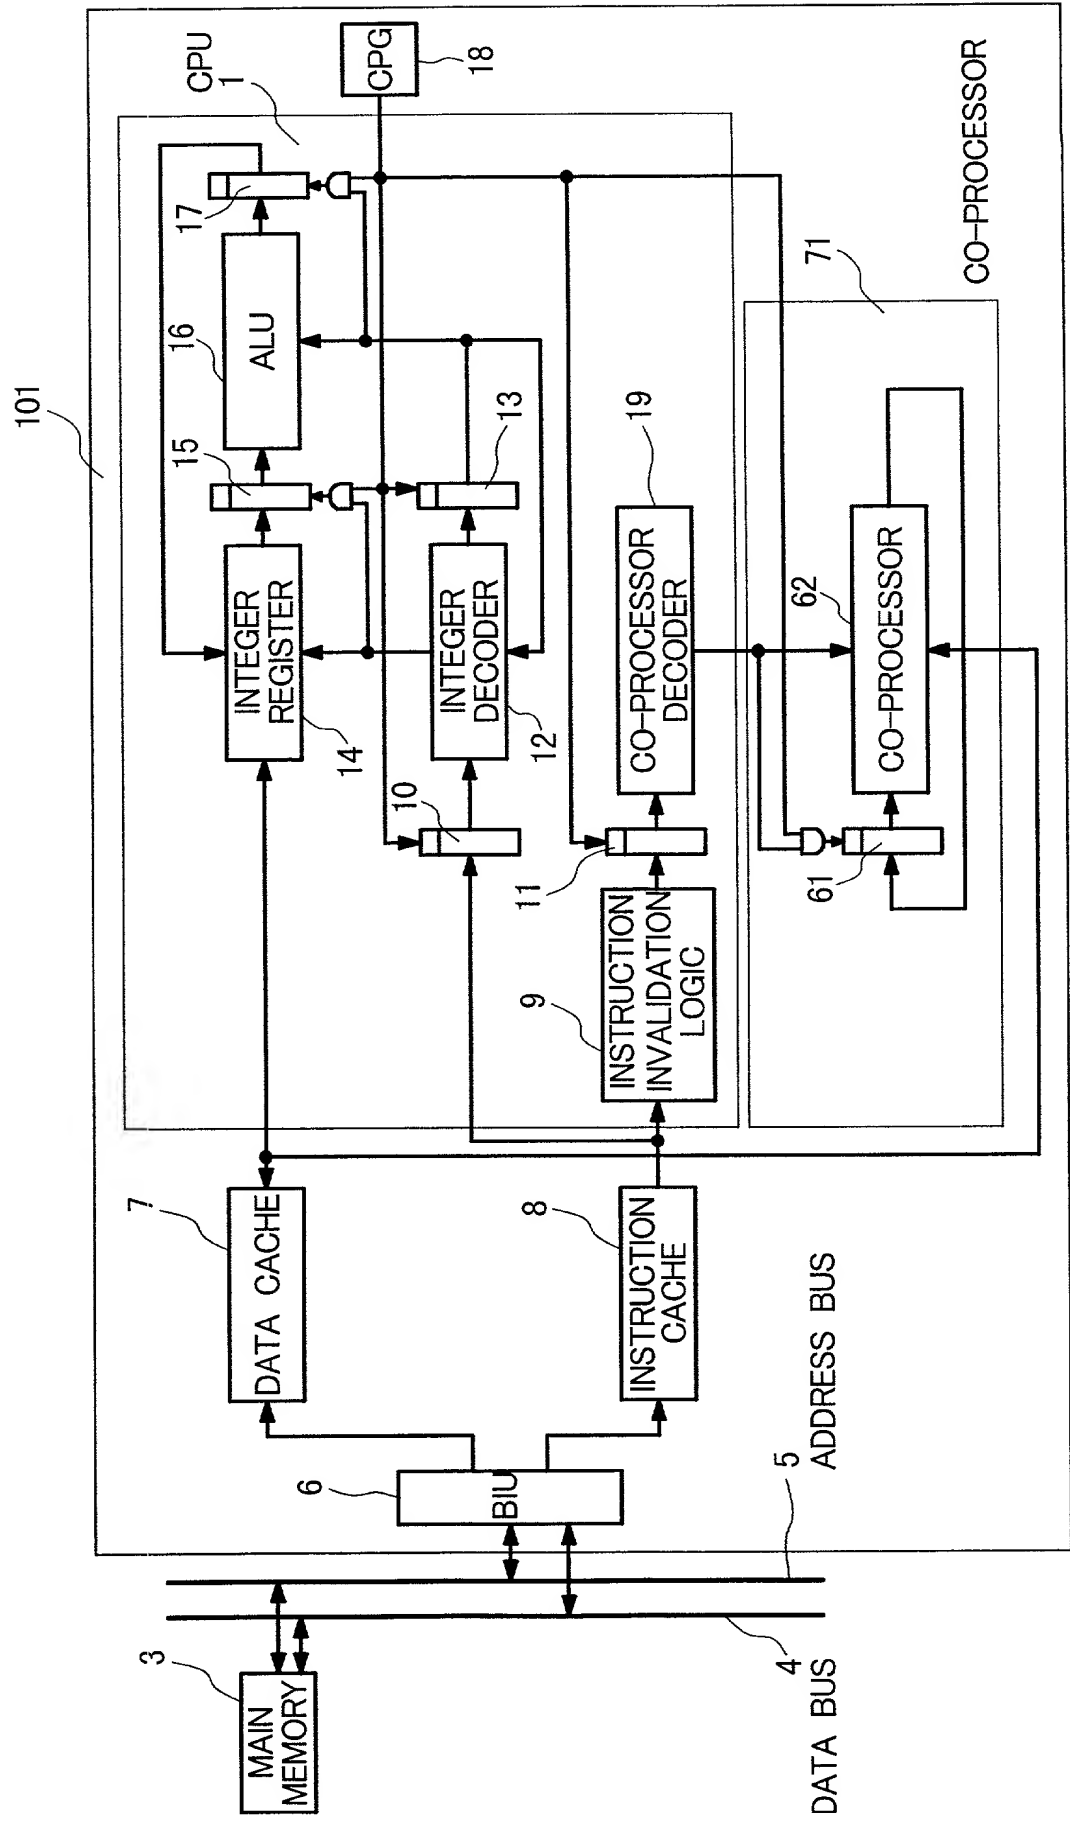

# FIG.9

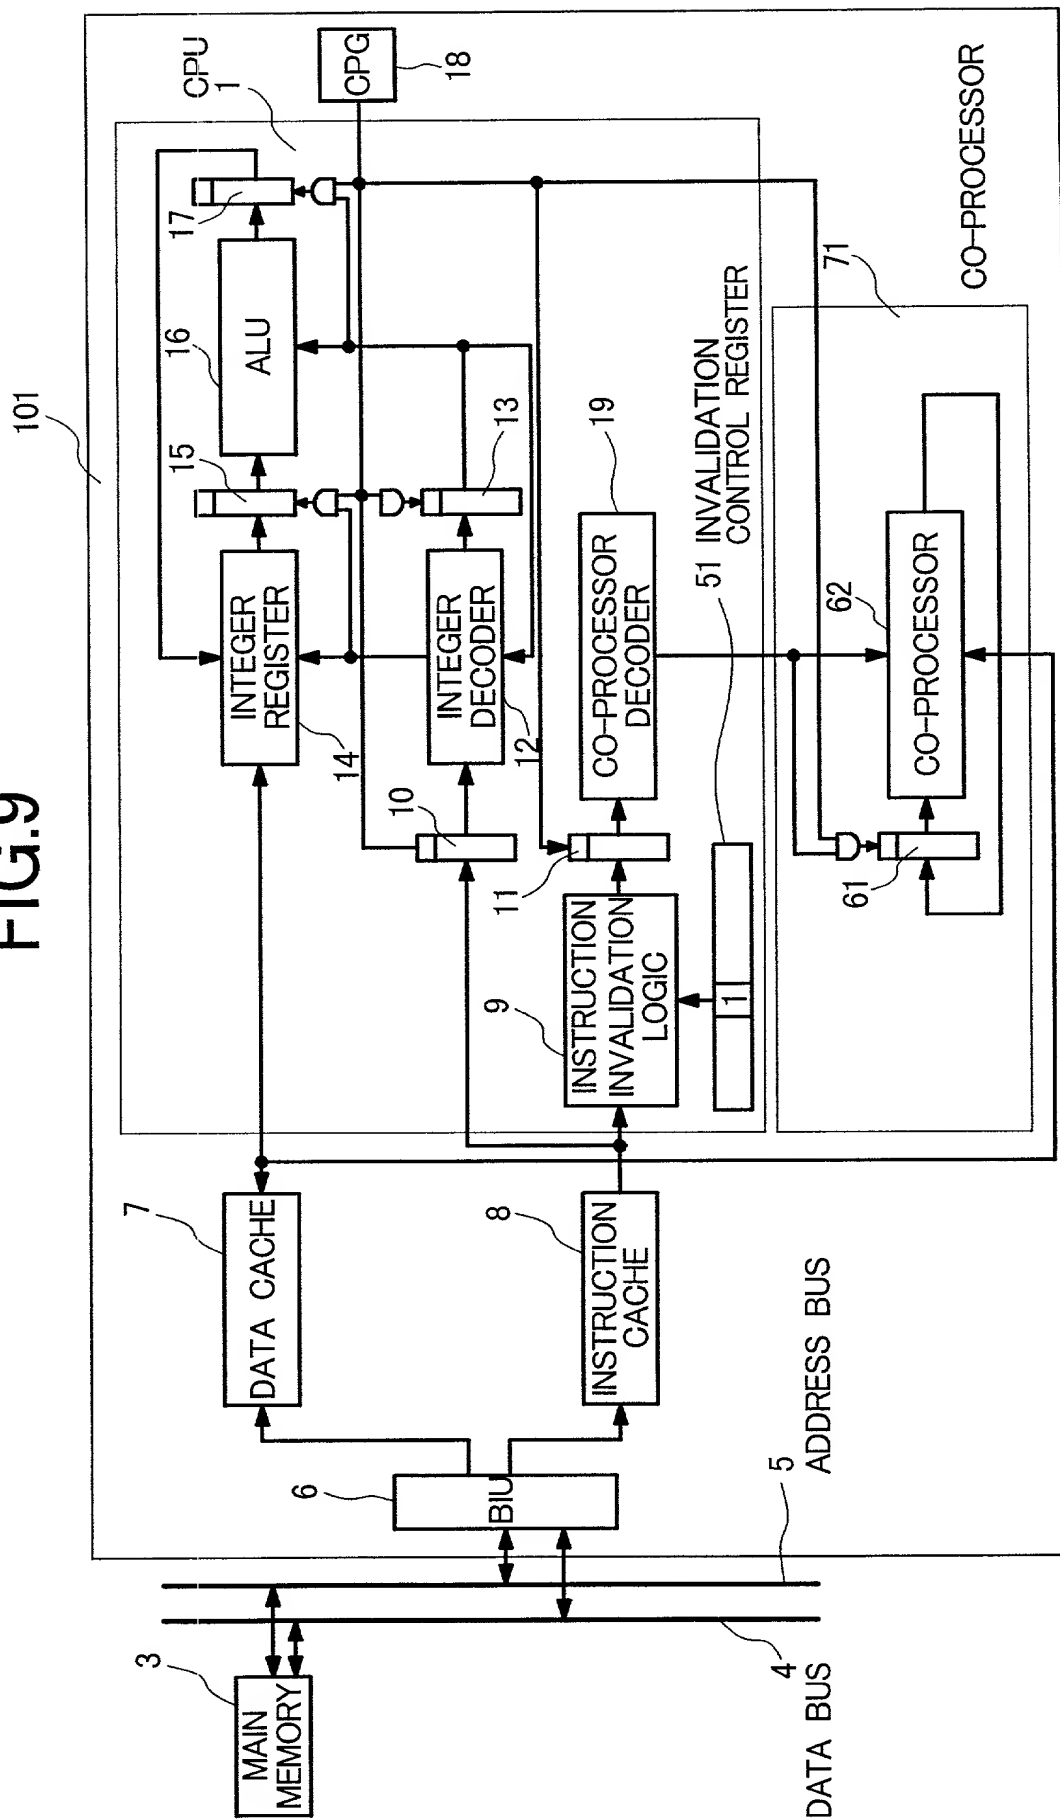

# FIG.10

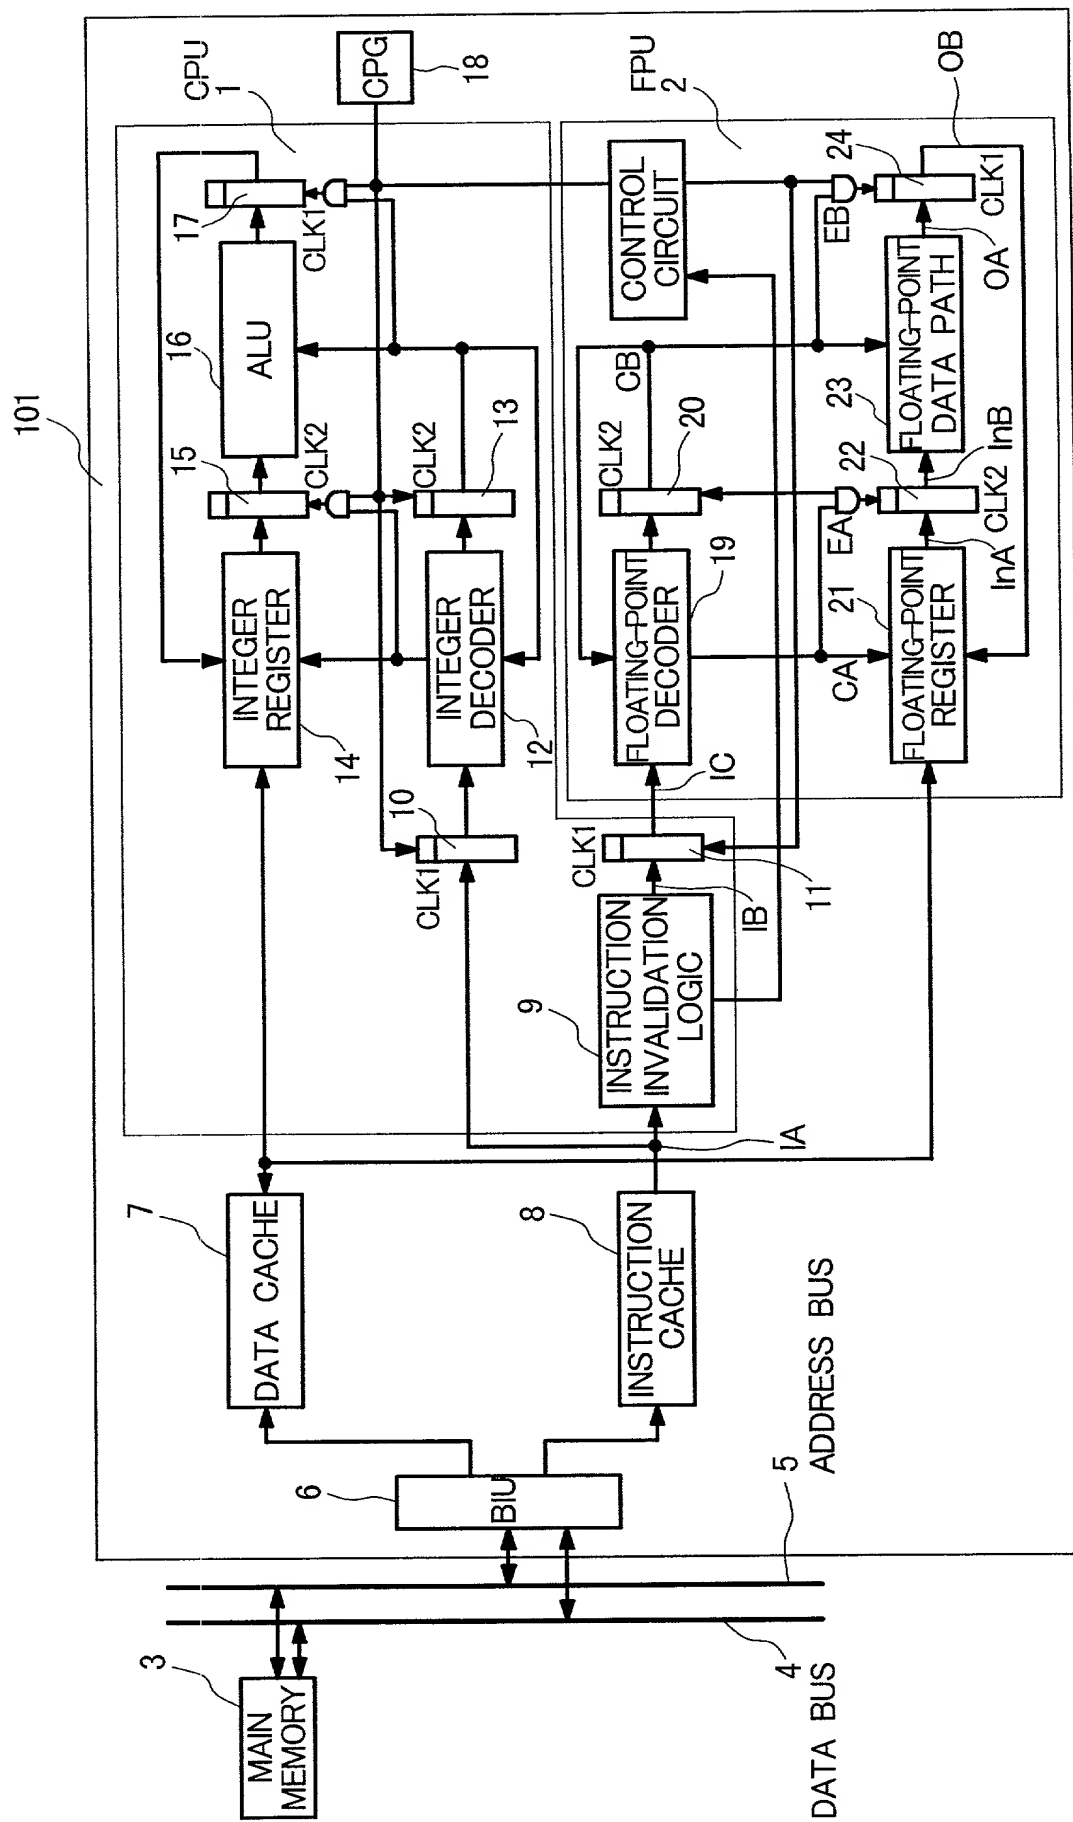

## Declaration and Power of Attorney For Patent Application

## 特許出願宣言書及び委任状

## Japanese Language Declaration

## 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

LOW POWER CONSUMPTION MICROPROCESSOR

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

The specification of which is attached hereto unless the following box is checked:

☐ \_\_月\_\_日に提出され、米国出願番号または特許協定条約国際出願番号を\_\_\_\_とし、  
(該当する場合) \_\_\_\_\_に訂正されました。☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

## Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

### Prior Foreign Application(s)

外国での先行出願

11-195409	Japan
(Number) (番号)	(Country) (国名)
(Number) (番号)	(Country) (国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.) (出願番号)	(Filing Date) (出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.) (出願番号)	(Filing Date) (出願日)
(Application No.) (出願番号)	(Filing Date) (出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed  
優先権主張なし

9 / July / 1999	
(Day/Month/Year Filed) (出願年月日)	<input type="checkbox"/>
(Day/Month/Year Filed) (出願年月日)	<input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) (出願番号)	(Filing Date) (出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of application.

(Status: Patented, Pending, Abandoned) (現況: 特許許可済、係属中、放棄済)	
(Status: Patented, Pending, Abandoned) (現況: 特許許可済、係属中、放棄済)	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

## Japanese Language Declaration

(日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (*list name and registration number*)

Donald R. Antonelli, Reg. No. 20,296, David T. Terry, Reg. No. 20,178; Melvin Kraus, Reg. No. 22,466; William I. Solomon, Reg. No. 28,565; Gregory E. Montone, Reg. No. 28,141; Ronald J. Shore, Reg. No. 28,577; Donald E. Stout, Reg. No. 26,422, Alan E. Schiavelli, Reg. No. 32,087; James N. Dresser, Reg. No. 22,973 and Carl I. Brundidge, Reg. No. 29,621

書類送付先

Send Correspondence to:

Antonelli, Terry, Stout & Kraus, LLP  
Suite 1800  
1300 North Seventeenth Street  
Arlington, Virginia 22209

直接電話連絡先：(名前及び電話番号)

Direct Telephone Calls to: (*name and telephone number*)

Telephone: (703) 312-6600  
Fax: (703) 312-6666

唯一または第一発明者名	Full name of sole or first inventor Tetsuya YAMADA		
発明者の署名	日付	Inventor's signature	Date
		Tetsuya YAMADA	5/30/2000
住所	Residence Kawasaki, Japan		
国籍	Citizenship Japan		
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan		

(第二以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for second and subsequent joint inventors.)

第二共同発明者名		Full name of second joint inventor, if any Tomoichi HAYASHI	
第二共同発明者の署名	日付	Second inventor's signature	Date
		Tomoichi Hayashi	5/31/2000
住所		Residence Kokubunji, Japan	
国籍		Citizenship Japan	
私書箱		Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	
第三共同発明者名		Full name of third joint inventor, if any Sadaki NAKANO	
第三共同発明者の署名	日付	Third inventor's signature	Date
		Sadaki Nakano	5/31/2000
住所		Residence Kokubunji, Japan	
国籍		Citizenship Japan	
私書箱		Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	
第四共同発明者名		Full name of fourth joint inventor, if any Takanobu TSUNODA	
第四共同発明者の署名	日付	Fourth inventor's signature	Date
		Takanobu Tsunoda	5/31/2000
住所		Residence Kokubunji, Japan	
国籍		Citizenship Japan	
私書箱		Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	
第五共同発明者名		Full name of fifth joint inventor, if any Osamu NISHII	
第五共同発明者の署名	日付	Fifth inventor's signature	Date
		Osamu Nishii	5/30/2000
住所		Residence Inagi, Japan	
国籍		Citizenship Japan	
私書箱		Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	